



TEKNISET TIEDOT

TECHNICAL DATA

TEKNISKA DATA

TECHNISCHE DATEN

DONNÉES TECHNIQUES

DATOS TÉCNICOS



ESPECIFICAÇÕES TÉCNICAS

DATI TECNICI


ТЕХНИЧЕСКИЕ ДАННЫЕ

技術面データー

MEASUREMENTS

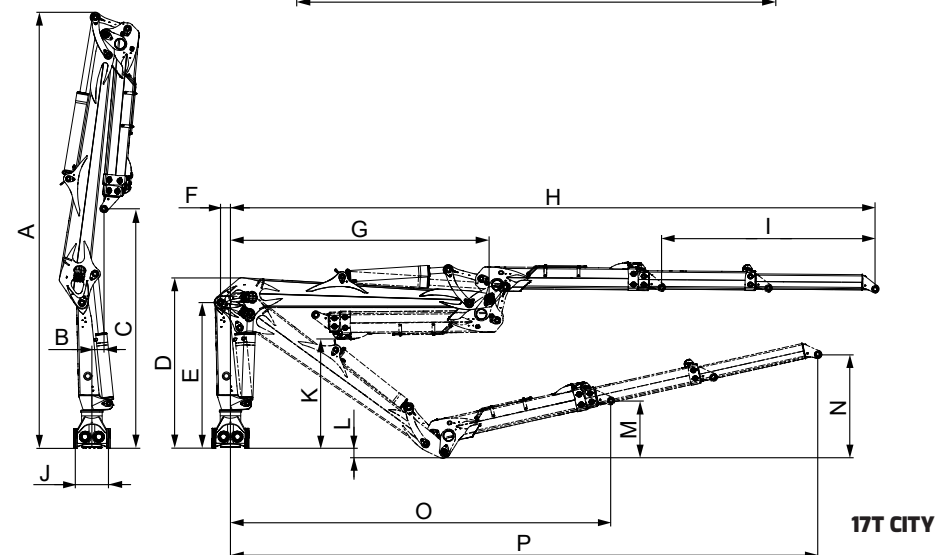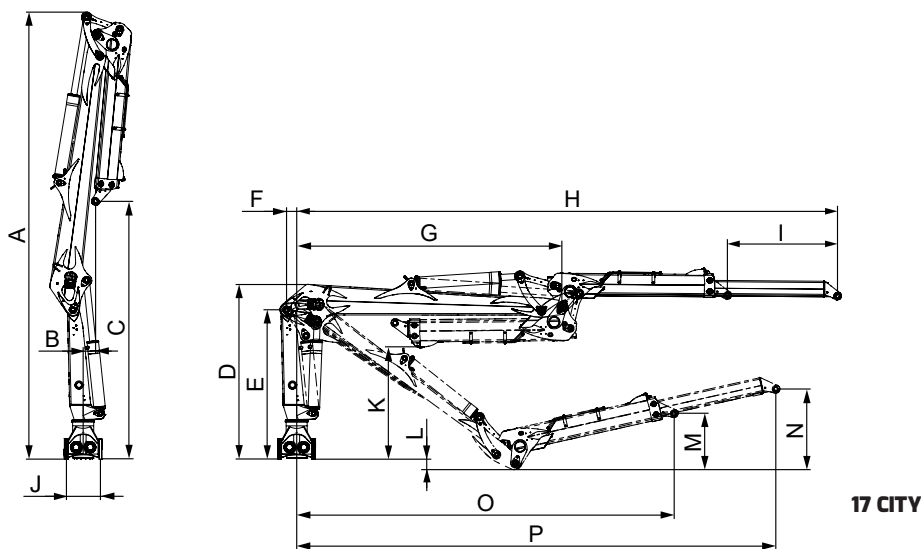


	17-81 STAND	17-81 HIGH	17T-97 STAND	17T-97 HIGH	17T-102 STAND	17T-102 HIGH	17T-115 STAND	17T-115 HIGH
A	6 570	6 770	6 570	6 770	7 070	7 270	7 070	7 270
B	135	125	145	140	180	175	120	135
C	3 620	3 825	3 610	3 810	4 109	4 310	3 610	3 810
D	2 570	2 770	2 570	2 770	2 569	2 769	2 570	2 770
E	2 195	2 395	2 195	2 395	2 195	2 395	2 195	2 395
F	150	150	150	150	150	150	150	150
G	3 900	3 900	3 900	3 900	4 400	4 400	4 400	4 400
H	8 100	8 100	9 710	9 710	10 210	10 210	11 510	11 510
I	1 600	1 600	3 200	3 200	3 200	3 200	4 000	4 000
J	500	500	500	500	500	500	500	500
K	1 700	1 900	1 660	1 860	1 675	1 865	1 680	1 865
L	150	75	152	75	430	370	435	370
M	890	800	910	815	945	805	940	845
N	1 270	1 115	1 660	1 450	1 745	1 420	1 760	1 545
O	5 700	5 645	5 710	5 650	6 110	6 055	6 635	6 560
P	7 260	7 210	8 820	8 785	9 210	9 195	10 550	10 500




	3 m	4 m	5 m	6 m	7 m	8 m	9 m	10 m	11 m	
17 City -81	5 700	4 350	3 500	2 930	2 510	2 170	-	-	-	kg
17T City -97	5 500	4 200	3 380	2 830	2 420	2 100	1 840	-	-	kg
17T City -102	5 300	4 050	3 260	2 730	2 330	2 020	1 770	1 580	-	kg
17T City -115	5 240	3 990	3 200	2 670	2 270	1 960	1 710	1 520	1 360	kg


Standard pillar

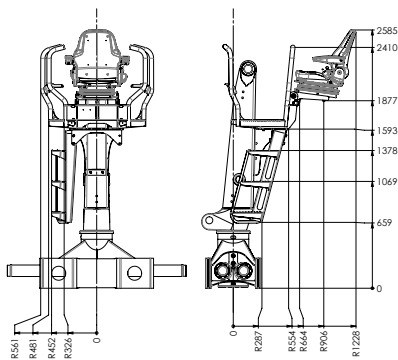


High pillar

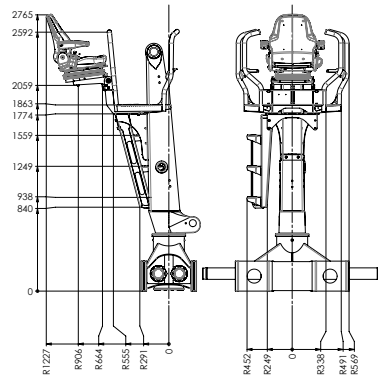


Standard pillar




High pillar



INSTALLATION

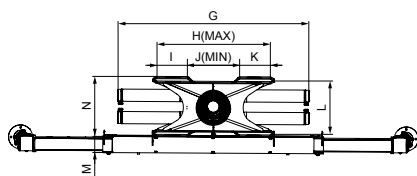


F	225	K	285
G	1 790	L	500
H	1 070	M	152
I	285	N	554
J	500		

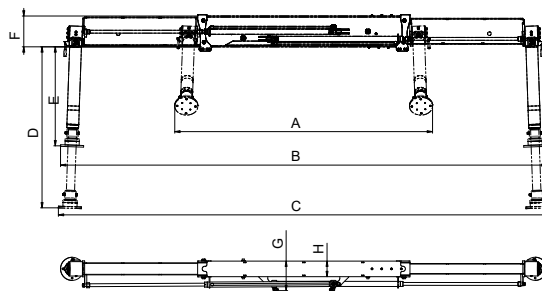


	L=600	L=700	L=800
A	2 514	2 518	2 523
B	4 741	4 749	4 756
C	4 783	4 797	4 812
D	1 570	1 770	1 970
E	966	1 071	1 170
F	300	300	300
G	288	288	288
H	152	152	152

OUTREACH DIAGRAMS


17-81 STAND

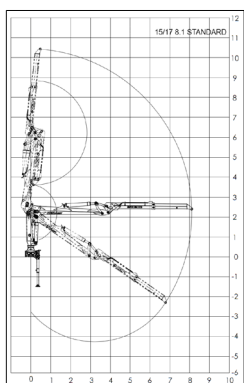


17-81 HIGH

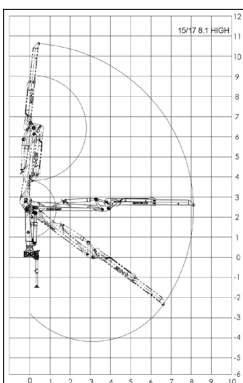


17T-97 STAND

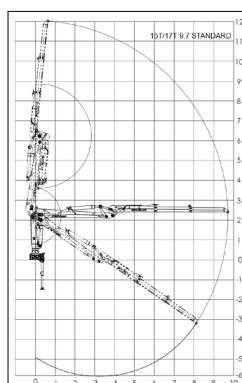


17T-97 HIGH

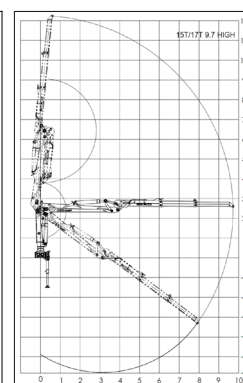

17T-102 STAND


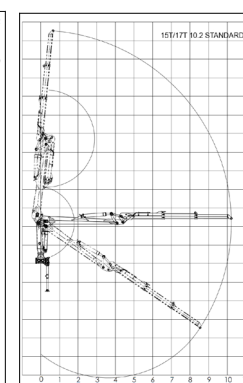


17T-102 HIGH

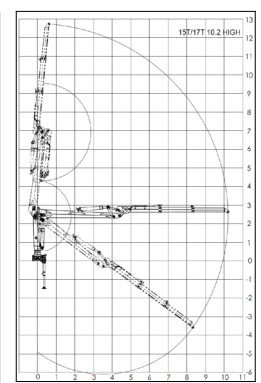



SLEWING OPTIONS

A1: working direction / pillar installation A2: working direction / pillar installation




A3: working direction / pillar installation


A4: working direction / pillar installation



17T-115 STAND

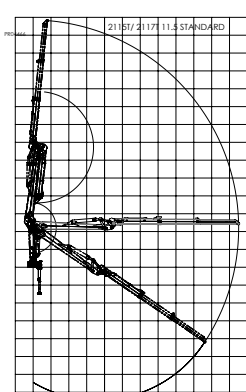

17T-115 HIGH

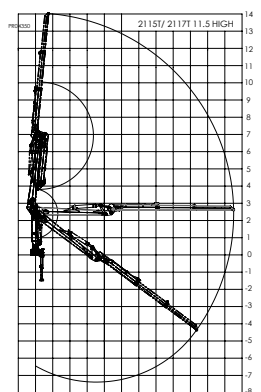

		17-81	17T-97	17T-102	17T-115
Nostomomentti (netto) • Lifting capacity (net) • Lyftmoment (netto) • Hubmoment (netto) • Couple de levage (net) • Capacidad de elevación (neto) • Binário de elevação • Prestazione (netta) • Момент подъема (нетто) • リフティングトルク (正味値)	(kNm)	173	167	161	153
Max. ulottuvuus • Max. outreach • Räckvidd • Reichweite • Portée • Alcance • Alcance máximo • Braccio max • Максимальный вылет • 最大伸び寸法	(mm)	8 100	9 710	10 210	11 510
Jatkeen pituus • Hydraulic boom extension • Utskjut • Ausschub • Rallonge • Extensión del brazo • Extensões • Sfilo idraulico • Удлинитель • 延長の長さ	(mm)	1 600	2 x 1600	2 x 1600	2 x 2 000
Kääntömomentti • Slewing torque • Vridmoment • Schwenkmoment • Couple de rotation • Torsión de rotación • Binário de rotação • Coppia di rotazione • Момент поворота • 回転トルク	(kNm)	28	28	28	28
Kääntökulma • Slewing angle • Vridvinkel • Schwenkwinkel • Angle de rotation • Ángulo de rotación • Ângulo de rotação • Rotazione • Угол поворота • 回転角度	(°)	425	425	425	425
Suosittava hydr. tuotto • Recommended oil flow • Rek. oljeflöde • Empfohlene Pumpenleistung • Recommendation pour la pompe • Recomendación para la bomba • Requisitos hidráulicos • Mandata olio raccomandata • Рекомендуемый гидронасос • 油流量の推奨値。					
► 1-piiri • single circuit • 1-krets • 1-Kreis • simple circuit • Un circuito • Uma bomba • Un circuito • 1 контур • 1-	(l/min)	80-90	80-90	80-90	80-90
► LS • LS (荷重出)	(l/min)	110 - 130	110 - 130	110 - 130	110 - 130
Työpaine • Operating pressure • Arbetstryck • Arbeitsdruck • Pression de fonctionnement • Presión de trabajo • Presión de operación • Pressione di lavoro • рабочее давление • 作動圧力	(MPa)	26	26	26	26
Paino sis. nosturin avohallintalaitteella ilman kahmaria, kääntäjää ja öljyä. Weight including the crane with top-seat, without the grapple, rotator and oil. Vikt inkl. kran med sittnock, utan gripare, rotator och öljä. Gewicht mit Hochsitz und mech. Steuerung, ohne Greifer, ohne Gelenk - Rotator und ohne Öl. Poids de la grue avec siege, sans le grappin, rotateur et l'huile. Peso incluyendo equipamiento de control y estabilizadores. Menos la garra, rotor y aceite hidráulico. Peso sem óleo, grappa, estabilizadores, rotador. Peso con comandi alti, senza pinza, rotatore e olio. Вес с приборами управления, без грейфера, ротатора и гидромасла. グラップル無しでローダーのコントロール装置を含む重量、回転装置と油。	(kg)	2 070	2 180	2 210	2 270
Erillisen tukijalkapalkiston paino • Weight of the separate stabilizers • Separata stödbens vikt • Gewicht der separaten Stützfüße • Poids des stabilisateurs • Peso de los estabilizadores • Peso de los estabilizadores • Peso stabilizzatori separati • Вес механизма опор отдельно • 別途スタビライザーブームの重量 (一型スタビライザーなしのクレーン)。	(kg)	450	450	450	450

Datasheet_KESLA_17_City_1_2020

Valmistajan antamat arvot ovat ohjeellisia. Kesla pidättää oikeuden muutoksiin.

The values provided by the manufacturer are indicative. Kesla reserves the right to make changes.

De lämnade värdena av tillverkaren är riktgivande. Kesla förbehåller sig rätten till ändringar.

Die Angaben des Herstellers sind Richtwerte. Kesla behält sich das Recht auf Änderungen vor.

Les valeurs communiquées par le fabricant sont seulement indicatives. Kesla se réserve le droit à toutes modifications.

Los datos ofrecidos por el fabricante son orientativos. Kesla se reserva el derecho de modificarlos.

Os valores pelo fabricante são indicativas. Kesla reserva-se o direito de fazer alterações.

I dati del costruttore sono indicativi. Kesla si riserva il diritto di modificarli.

Приводимые изготовителем показатели являются инструктивными. Изготовитель оставляет за собой право на изменения.

メーカーによる値はあくまでも基本表示です。KESLAは図更替の権利を保留します。

Classification according: EN12999:2011 HC1/HD4/B4



Kesla Oyj
Kuurnankatu 24
FI-80100 JOENSUU, FINLAND
Tel. +358 207 862 841
Fax +358 13 610 0521
www.kesla.com

